



NON FURLING MAINSAIL/FURLING HEADSAIL MEASUREMENT ILLUSTRATION

XY: MEASURED DISTANCE FROM POINT AT WHICH TOP OF HEADBOARD SHOULD LIE DOWN TO BEARING SURFACE OF TACK SHACKLE/TACK-PIN:


WZ: MEASURED DISTANCE FROM VERY BACK OF CLEW (WHEN FOOT IS FULLY TENSIONED) FORWARD TO BACK OF MAST: _____

LUFF SLIDERS:

IF RECTANGULAR, MEASURED WIDTH:

IF CYLINDRICAL, MEASURED DIAMETER:

PHOTOS (CIRCLED)

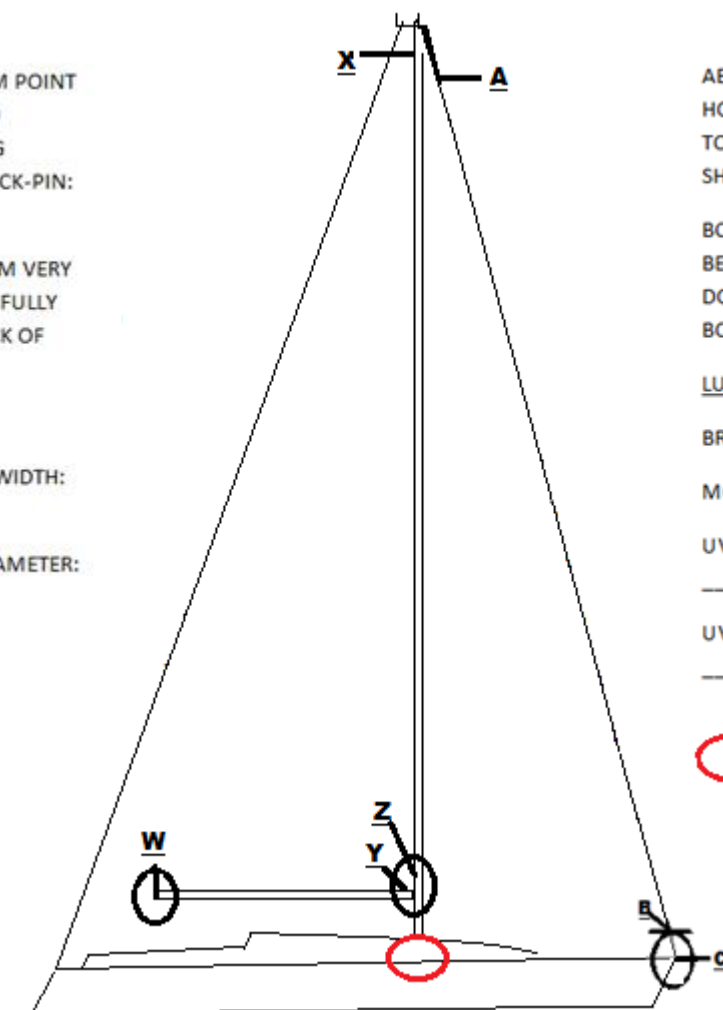

AB: MEASURED DISTANCE FROM FULLY HOISTED SWIVEL HEAD SHACKLE DOWN TO BEARING SURFACE OF TACK SHACKLE: _____

BC: MEASURED DISTANCE FROM BEARING SURFACE OF TACK SHACKLE DOWN TO FORESTAY DECK (OR BOWSPRIT) INTERSECT: _____


LUFF FOIL:

BRAND: _____

MODEL: _____

UV PROTECTION SIDE:

UV PROTECTION COLOR:

 PHOTO OF LEAD-BLOCK POSITION (FOR NON OVERLAPPING HEADSAILS)